

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
19 September 2002 (19.09.2002)

PCT

(10) International Publication Number  
**WO 02/073916 A1**

(51) International Patent Classification<sup>7</sup>: H04L 27/00, 1/00

(21) International Application Number: PCT/EP01/02813

(22) International Filing Date: 13 March 2001 (13.03.2001)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): MAT-SUSHITA ELECTRIC INDUSTRIAL CO., LTD [JP/JP]; Kadoma, Osaka 571-8501 (JP).

(72) Inventors; and

(75) Inventors/Applicants (for US only): GOLITSCHKE, Alexander [DE/DE]; Panasonic European Laboratories GmbH, Monzastrasse 4C, 63225 Langen (DE). SEIDEL, Eiko [DE/DE]; Panasonic European Laboratories GmbH, Monzastrasse 4 C, 63225 Langen (DE).

(74) Agent: KUHLE, Dietmar; Grünecker, Kinkeldey, Stockmair & Schwanhäusser, Maximilianstr. 58, 80538 München (DE).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD AND SYSTEM FOR BLIND DETECTION OF MODULATION TYPE

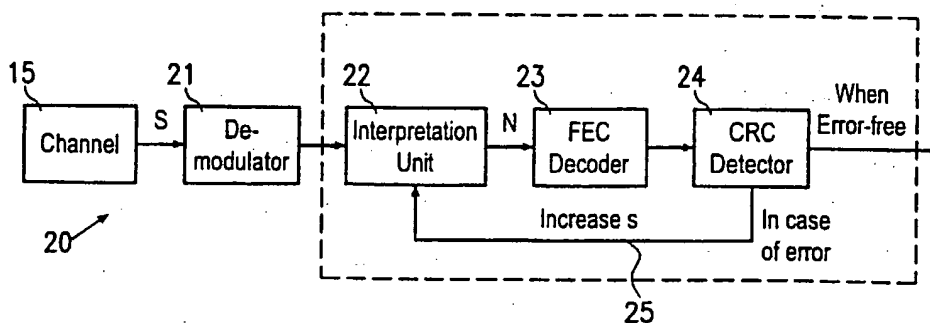

(57) Abstract: The invention relates to a method and a receiver for demodulating a modulation symbol in a communication system without knowledge of the modulation constellation employed in a transmitter to modulate this symbol before transmission. According to the method, the invention comprises the steps of interpreting the modulation symbol as a symbol of one of a family of hierarchical modulation constellations, decoding the demodulated symbol using a forward error correction (FEC) technique and demodulating the symbol according to the assumed modulation constellation. Finally, the demodulated symbol is checked for correctness. The receiver comprises of a corresponding interpretation unit, a demodulator and an FEC decoder as well as means for checking the correctness of the demodulated symbol.

WO 02/073916 A1

## METHOD AND SYSTEM FOR BLIND DETECTION OF MODULATION TYPE

The present invention relates to a method of demodulating a modulation symbol in a receiver of a communication system without knowledge of the modulation scheme employed in a transmitter to modulate the symbol before transmission. Further, the invention relates to a receiver in a communication system to carry out such demodulation method.

In communication systems, high modulation transmission of information is necessary to achieve high data transmission rates. However, the higher the order of the modulation, the more likely it is that a certain number of bits cannot be decoded correctly after demodulation. Therefore, sometimes it is desirable to adapt the modulation order according to the quality of the channel. This is particularly important for radio communication systems, where reasons for the adaptation can be either one of channel conditions, noise/interference limitations, scheduling requirements or radio resource availability. It is clear to those skilled in the art that the given criteria are non-exhaustive. Usually, adaptive modulation involves a multitude of possible modulation orders that allow to transmit more data at the expense of error-robustness of the transmission.

The receiver in a communication system has to be able to demodulate the received signal. A method known in the art to cope with adaptive modulation transmission is so-called "blind modulation". Here, the modulation scheme used by the transmitter is not known to the receiver. Therefore, the receiver has to demodulate the received signal according to different modulation constellations. In order to decide which modulation scheme was used, some sort of error detection scheme is needed, and if for a given assumed modulation order the error detection scheme yields no errors, this modulation order is selected for demodulation.

However, in particular in radio communication systems, which frequently experience interference and varying channel conditions, it is difficult to distinguish between errors which result from bad channel quality and those which result from the fact that the modulation order assumed at the receiver does not correspond with the modula-

tion scheme used by the transmitter. Hence, the "blind modulation" only works under the condition that the transmission of data is very robust against errors.

An example for a "blind modulation" scheme is disclosed in "A Layered Demodulation Scheme for Adaptive Modulation Systems Without Modulation Information Transmission" presented at the Third International Symposium on Wireless Personal Multimedia Communications (WPMC) on November 12-15, 2000, Bangkok, Thailand.

Other known adaptive modulation methods require knowledge of the employed modulation scheme or constellation. Hence, it is known in the art to transmit, in addition to the modulated symbols, information which tells the receiver which modulation scheme was employed in the transmitter to modulate the symbol prior to transmission. With this knowledge, the receiver can apply the correct demodulation. Another approach known in the art is to let the receiver decide which modulation scheme should be used by the transmitter for future symbols. According to some algorithm (e.g. depending on the channel condition), the receiver makes a decision and delivers information on the desired modulation scheme to the transmitter through a feedback channel.

The drawback of both above described approaches is that they require additional signalling, i.e. they occupy part of the communication resource to indicate the modulation of choice or some other kind of overhead to facilitate demodulation. This means that less communication resource is available for a user to transmit the desired information. Finally, the prior art modulation methods add hardware complexity to the receiver.

The object underlying the present invention is to provide a demodulation method and a receiver in a communication system being able to demodulate correctly the symbols modulated with an unknown modulation scheme without sending overhead signaling for the modulation operation and without adding complexity to the receiver.

This object is solved according to a demodulation method defined by the method steps of claim 1 and respectively by a receiver comprising the features of claim 9.

According to the method and receiver underlying the present invention, a modulation symbol is interpreted as a symbol of one of a family of hierarchical modulation constellations and demodulated according to the assumed constellation. Subsequently, the demodulated symbol is decoded using an FEC technique and then checked for correctness.

Consequently, the transmitter does not need to send overhead signalling for the demodulation operation and the receiver demodulates the symbol according to a "trial and error" principle under inclusion of the FEC technique to ensure that transmission errors in the decoding operation are corrected in order to compensate for bad channel conditions.. Although it might take several trials until the correct modulation constellation is found, such demodulation approach is extremely simple and can be implemented fairly easily in a signal processing circuit. Hence, the structure of the corresponding demodulation receiver underlying the invention is also significantly simplified.

Moreover, the present invention takes advantage of the fact that in most communication systems, in particular, in radio communication systems, a check for correctness of the demodulated symbols is already carried out as a standard procedure for assessing other criteria, such as, for example, the quality of the communication link.

According to a further embodiment of the method, the FEC technique is used to determine whether the decoding result, i.e. the modulated symbol is correct. According to this embodiment, the method becomes further simplified, as it obviates the need for a separate verification of the correctness of the demodulated symbol.

According to a variant of the method, the step of checking the demodulated symbol for correctness is performed by a separate cyclic redundancy check (CRC) error detection unit which verifies the demodulated symbols in a fast and reliable manner.

According to a further preferred embodiment of the method, a modulation symbol is constituted by a structure of an M-tuple of bits. The modulation constellation is therefore formed by a plurality of  $2^M$  modulation symbols. The defined structure of the

modulation symbol is useful for mapping the symbol bits into a signal constellation diagram containing a plurality of regions defined by decision boundaries for each bit.

According to a further preferred embodiment of the method, the steps of interpreting and demodulating are successively repeated, wherein in each iteration the modulation symbol is interpreted as a symbol of a different one of the plurality of possible modulation constellations. Hence, the method repeats the steps of interpreting and demodulating until the correct demodulated symbol is obtained. The corresponding embodiment of the receiver underlying the invention contains a feedback loop for notifying the interpretation unit on the result of the check for correctness.

According to a variant of the method underlying the invention, the steps of interpreting and demodulating are carried out simultaneously for a plurality of different possible modulation constellations. Further, the demodulated symbols are selected depending on the result of the check for correctness. In the corresponding preferred embodiment of the receiver, the means for interpreting and demodulating are arranged in parallel branches in order to allow the simultaneous processing. According to this embodiment, although hardware complexity is increased, the advantage lies in the fact that correct demodulated symbols are obtained very quickly.

According to a further advantageous embodiment of the method, the modulation constellations are of different order and the repetition of the interpretation and demodulation steps are performed in a descending modulation order. Alternatively, the repetition can be based on the preceding successful modulation constellation which provided correct demodulated symbols.

In the following, preferred embodiments of the present invention are described in further detail in order to facilitate the understanding of the invention with reference to the accompanying drawings.

Figures 1-4 shows examples of QAM signal constellation diagrams in the complex signal plane,

Figure 5 illustrates an example of a 16-QAM signal constellation diagram in the complex signal plane,

Figure 6 shows a transmitter of a communication system to which the method underlying the invention is applied,

Figure 7 shows a first embodiment of a receiver underlying the invention, and

Figure 8 shows a second embodiment of a receiver underlying the invention.

In connection with figures 1-4, the concept of a family of hierarchical modulation constellations will be explained. In each figure, a bit value  $S_x$  is mapped into a region of the complex signal plane. Generally, a symbol  $S$  is constituted by a structure  $S_0...S_{M-1}$  of an  $M$ -tuple of code bits. Hence, there are  $2^M$  modulation symbols possible, which in its entirety form a modulation constellation or symbol alphabet. In a communication system, several modulation constellations are generally possible, which are distinguished by the number of bits used to define the modulation order.

The regions in the signal constellations diagrams depend on the position of the bit within a symbol  $S$  as well as on its bit value  $S_x$  which can be either "+1" or "-1". A "\*" signifies bit values that do not influence the region for the bit. A constellation like that of figure 1 shows that the bit  $S_0$  is mapped to two different regions, i.e. to the left side having a bit value of "-1" or to the shaded right side having a bit value of "+1". Similar constellations for the bit at the second, third and fourth positions are shown in figures 2-4 respectively. Hence, these figures show the regions for a total of four bits which form a 16-QAM symbol that is depicted in figure 5. For simplicity, in figure 5 each bit is only represented by its sign, either "+" or "-". If the modulation order is increased, this process continues in theory infinitely.

If the  $M$  regions corresponding to the respective bit  $S_x$  ( $x = 0..M-1$ ) are overlaid, the regions where a demodulator would normally define the decision boundaries for the symbol  $S = (S_0...S_{M-1})$  are obtained, where  $S_0$  is designated as the "top bit" while  $S_{M-1}$  is the "bottom bit". The specific symbol which is transmitted in the communication system is usually located in the center of such a decision region.

For a further discussion of digital demodulation in signal constellation diagrams, see e.g. PROAKIS "Digital Communications, 3<sup>rd</sup> Edition" 1995 McGraw-Hill, ISBN 0-07-051726-6, pages 173 ff.

Figure 6 shows a typical transmitter 10 to which the method underlying the invention is applied. From an infobit source 11, a sequence of infobits having a length  $I$  and constituting an infoword are input to a CRC encoder 12. In the encoder, the infoword is appended with an error detection check sum (e.g. CRC) of length  $C$ . The resulting sequence of length  $I+C$  is then processed through an FEC encoder 13, which adds redundancy used to correct errors at the receiver. The output of the FEC encoder is a sequence of codebits constituting a codeword of length  $N$  which is input to a modulator 14 where a symbol  $S$  is constructed from the code word. As mentioned above, the symbol  $S$  generally has the structure of an  $M$ -tuple of bits  $S_0...S_{M-1}$ . Finally, the symbol is mapped onto the physical communication channel 15 of the communication system and transmitted by means of known transmission methods, e.g. TDMA, CDMA, or FDMA multiplex schemes suited for radio communication systems. It is clear to those skilled in the art that other modulation schemes can equally be applied depending on the specific requirements for the communication channel.

Figure 7 shows a first embodiment of the receiver according to the invention. Upon receiving a symbol  $S$  through the communication channel 15, a demodulator 21 starts to demodulate the symbol assuming the highest modulation order which occurs at the transmission system. Hence, the  $M$ -tuple of bit values constituting a symbol of the highest occurring modulation order are buffered in an interpretation unit 22.

The interpretation unit 22 utilizes only part of the demodulated information received from the demodulator 21 and treats the modulator symbol as if it originates from another modulation constellation with fewer constellation points, i.e. having a lower modulation order. For example, if the demodulator is adapted for 16-QAM, the interpretation unit 22 interprets its input by forwarding only the two most significant bits to its output. The joined function of the demodulator 21 and the interpretation unit 22 is thus identical to the function of a demodulator for QPSK. This effect however re-

quires that the structure of the modulation constellation employed is hierarchical as described above with regard to figures 1-4.

Subsequently, the interpretation unit buffer provides the number of infobits to an FEC decoder 23 in order to correct errors in the received symbol. After decoding, a CRC detector 24 performs an error detection check over the decoded infobits to determine whether the codeword has been decoded correctly.

A more detailed discussion of FEC and CRC coding techniques is available from Sampei, Seiichi "Applications of Digital Wireless Technologies to Global Wireless Communications," Prentice Hall 1997, ISBN 0-13-214272-4, Chapter 6.

If the result is free of errors, the codeword is output, as sequence of infobits. If the error detection finds the demodulated symbol to be incorrect, a feedback loop 25 provides an instruction command to the interpretation unit 22 to repeat the interpretation and demodulation operation.

In the second iteration, it is assumed that the preceding modulation constellation is incorrect and hence, a different modulation constellation is tried. For example, a modulation constellation of the lower order is assumed to be correct and the corresponding number of bits for this modulation constellation is input to the buffer of the interpretation unit 22. After decoding and error detection, it is again determined whether the result is free of errors.

This process continues until either the number of possible modulation orders is reached or the error detection indicates correct reception. The effects for the described approach for hierarchical modulation is that after the interpretation unit, the values at the input to the FEC decoder are exactly the same as if the demodulator was working for lower order modulation.

In the following, an example for possible modulation orders are described:

64-QAM: 1 symbol = 6 bits,  $M_1 = 6$ ,

16-QAM: 1 symbol = 4 bits,  $M_2 = 4$ ,



QPSK: 1 symbol = 2 bits,  $M_3 = 2$ .

Generally, with each iteration  $s$ , the top  $M_{\max} - k_s$  bit values of each symbol which are applied from the interpretation unit buffer to the FEC decoder starting with  $k_1 = 0$ . The bottom  $k_s = M_{\max} - M_s$  values of each symbol  $S$  are not forwarded to the FEC decoder. Under the assumption that each modulation constellation consists of  $2^M$  constellation points and  $M_s > M_1$  for all iterations  $s$ , then  $k_s = M_1 - M_s$  ( $M_1$  is then equivalent to  $M_{\max}$ ).

In the present example, the number of possible modulation orders and hence, the number of iterations is 3. In the successive iterations, the top  $M_{\max} - k_s$  bit values of each symbol are input to the interpretation unit buffer 22. In the first iteration, all six values are forwarded to the decoder. Hence,  $k_1 = 0$ . In case of errors output from the CRC decoder 24, the demodulation and decoding operation is repeated. In the second iteration  $k_2 = 2$  and only the top four values of each symbol are forwarded to the decoder. This is equivalent to demodulating the received signal according to the 16-QAM modulation scheme. Finally, in the third and last iteration,  $k_3 = 4$  and only the top two values are forwarded to the decoder which is equivalent to a QPSK modulation. As a result, although there is only one demodulator required in the receiver, the output is interpreted as if several demodulators were present.

In the above-described embodiment, the value  $k_s$  has been incremented. The increment value depends on the type of modulation constellations that are employed. An increment value of 2 can be applicable for QAM signal constellations, since this generates a cascade of interpreting the received symbols as 64-QAM  $\rightarrow$  16-QAM  $\rightarrow$  QPSK symbol if we assume 64-QAM to be the modulation constellation with the highest available order. However, the increment value does not have to be constant and depending on the modulation constellations employed in the system, it can vary, for example, 16-PSK  $\rightarrow$  8-PSK  $\rightarrow$  2-PSK which results in values of  $k_1 = 0$ ,  $k_2 = 1$ ,  $k_3 = 3$ .

Although it has been described above that the demodulation should be attempted first for the highest order modulation constellation, it is clear to the skilled person that the attempt can be also ordered in descending order. Further, it is possible that the last correctly detected modulation constellation is tried first based on the reasoning

that the most probable modulation constellation is the one that was used in the previous demodulation event.

If no correct decoding is possible, any of the (wrongly) decoded infowords can be chosen as output, since there is no way of telling which of the decoding loops resulted in the least number of bit errors. Therefore, any of the outputs could be used as the final decision. Again, depending on the system, it can be useful to choose that modulation output that was successful in the previous demodulation instant.

With reference to figure 8, a further embodiment of the receiver according to the invention is described. This embodiment differs from that of figure 7 by the replacement of the feedback loop 25 by a plurality of parallel branches, each containing an interpretation unit 22-1, 22-2,...22-n, an FEC decoder 23-1, 23-2,...23-n and a CRC detector 24-1, 24-2,...24-n. The elements of each branch corresponds essentially to those enclosed by a dashed line in the embodiment of figure 7. In each branch, the interpretation unit uses a distinct  $k$  value for simultaneously demodulating the received symbol from the demodulator 21 for all possible  $k$  values. Hence, the symbols are demodulated for all possible demodulation constellations simultaneously. Thereafter, a selector 26 chooses from all branches the one which indicates that demodulation has resulted in no errors which will then be chosen as the active branch for the final decision.

As a further variant of the embodiments of figures 7 and 8, it is possible to substitute the CRC detector by an FEC decoder which is able to determine whether the FEC decoding operation is correct. Other forms of checking the output of the FEC decoder for correctness are also suitable for substituting the error detector 24.

## Claims

1. A method of demodulating a modulation symbol in a receiver of a communication system without knowledge of the modulation constellation employed in a transmitter to modulate the symbol before transmission, comprising the steps of:  
  
interpreting the modulation symbol as a symbol of one of a family of hierarchical modulation constellations,  
  
demodulating the symbol according to the assumed modulation constellation,  
  
decoding the demodulated symbol using a forward error correction (FEC) technique, and  
  
checking the decoded symbol for correctness.
2. The method according to claim 1, wherein the step of checking the demodulated symbol for correctness is performed using the FEC technique.
3. The method according to claim 1, wherein the step of checking the demodulated symbol for correctness is performed by a CRC detection unit.
4. The method according to one of claims 1-3, wherein the modulation symbol is constituted by a structure  $S_0 \dots S_{M-1}$  of an M-tuple of symbol bits and the plurality of  $2^M$  modulation symbols form the modulation constellation of a particular order.

5. The method according to one of claims 1-4, wherein the interpretation step and the demodulation step are successively repeated, wherein in each iteration the modulated symbol is interpreted as a symbol of a different one of the plurality of possible modulation constellations.
6. The method according to claim 5, wherein the repeated interpretation and demodulation steps are performed for modulation constellations of descending modulation order and/or are based on a previous successful modulation constellation which provided correct demodulated symbols.
7. The method according to one of claims 1-4, wherein the interpretation step and the demodulation step are carried out simultaneously for a plurality of different possible modulation constellations and further comprising the step of selecting the demodulated symbols depending on the result of the check for correctness.
8. The method according to one of claims 1-7, wherein during the interpretation step  $M_{\max} - k_s$  of symbol bits are stored in a buffer before being applied to the FEC decoder, where  $M_{\max}$  denotes the number of symbol bits of highest order modulation constellation,  $M_s$  is the number of symbol bits of the respective assumed modulation constellation and  $k_s$  is a value which varies for each assumed modulation constellation according to  $k_s = M_{\max} - M_s$ .
9. A receiver in a communication system for demodulating a modulation symbol without knowledge of the modulation constellation employed in a transmitter to modulate the symbol prior to transmission, comprising:

an interpretation unit (22) for interpreting the modulation symbol as a symbol of one of a family of hierarchical modulation constellations,

a demodulator (21) for demodulating the symbol according to the assumed modulation constellation, and

a forward error correction (FEC) decoder (23) for decoding the demodulated symbol, and

means (24) for checking the demodulated symbol for correctness.

10. The receiver according to claim 9, wherein the FEC decoder (23) is adapted to check the decoded symbol for correctness.
11. A receiver according to claim 9, further comprising a CRC detection unit (24) for checking the demodulated symbol for correctness.
12. The receiver according to one of claim 9-11, further comprising a feedback loop (25) for notifying the interpretation unit (22) on the result for check for correctness.
13. The receiver according to one of claims 9-11, comprising a plurality of interpretation units (22-1, 22-2,...22-n), FEC decoders (23-1, 23-2,...23-n) and means (24-1, 24-2,...24-n) for checking the demodulated symbol for correctness arranged in parallel branches to demodulate the symbols simultaneously for a plurality of different possible modulation constellations.
14. The receiver according to one of claims 9-13, wherein the interpretation unit (22) comprises a buffer for storing and  $M_{\max} - k_s$  symbol bits, where  $M_{\max}$  denotes the number of symbol bits of highest order modulation constellation  $M_s$  is the number of symbol bits of the respective assumed modulation constellation, and  $k_s$  is a value which varies for each assumed modulation constellation according to  $k_s = M_{\max} - M_s$ .

1/3

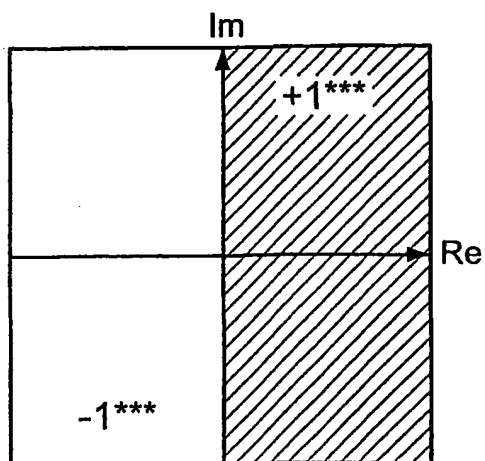


FIG. 1

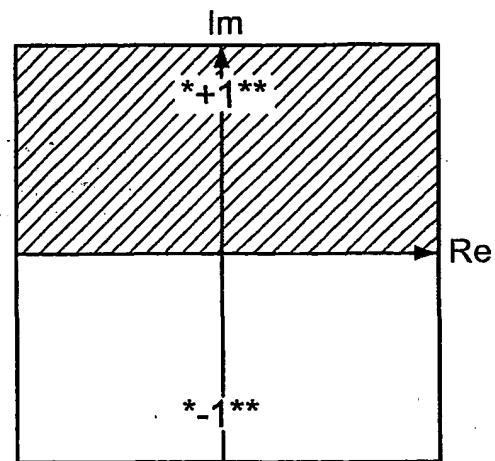


FIG. 2

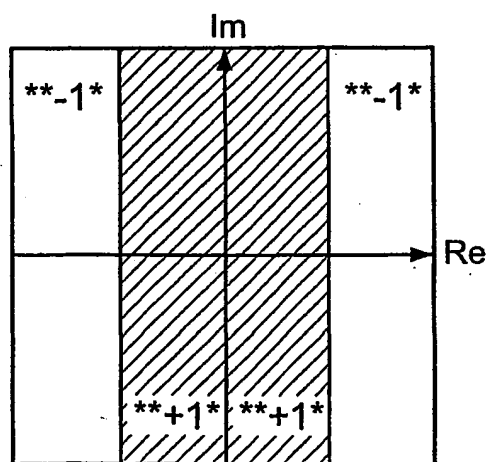


FIG. 3

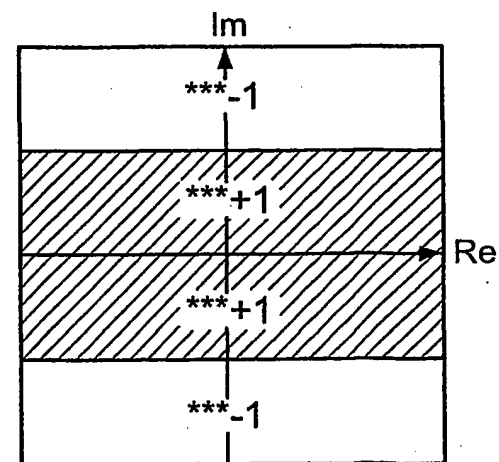


FIG. 4

2/3

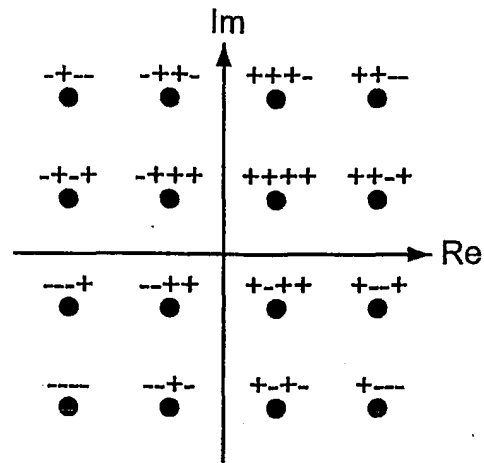


FIG. 5

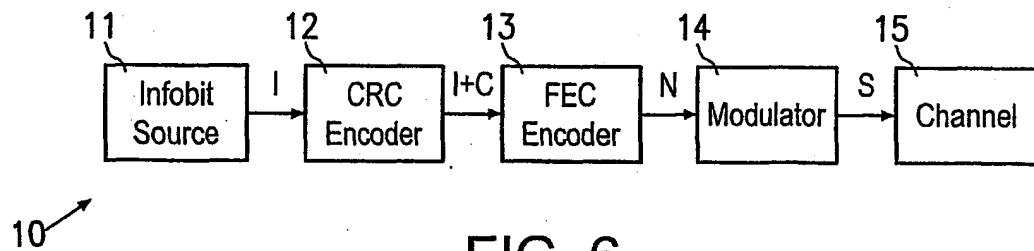


FIG. 6

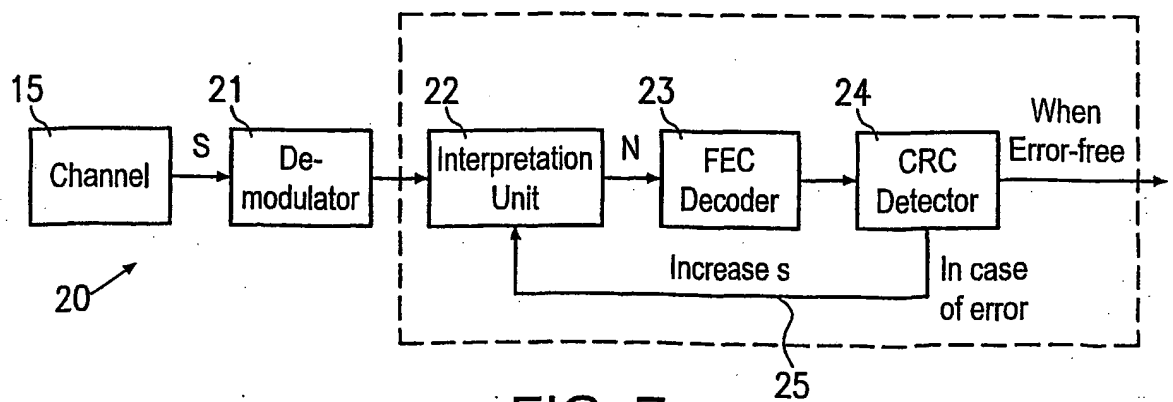


FIG. 7

3/3

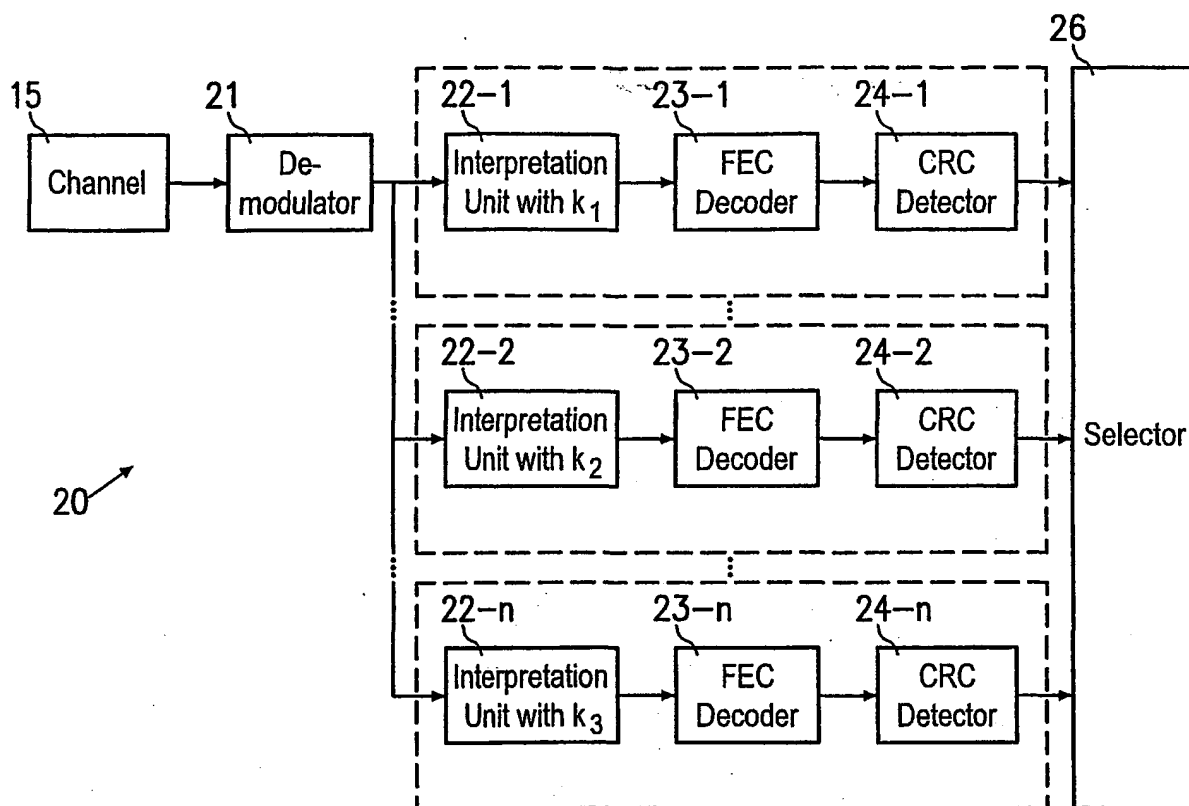


FIG. 8



## INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 01/02813

A. CLASSIFICATION OF SUBJECT MATTER  
 IPC 7 H04L27/00 H04L1/00

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, INSPEC, COMPENDEX

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	<p>EP 0 822 714 A (THOMSON CONSUMER ELECTRONICS) 4 February 1998 (1998-02-04)</p> <p>page 3, column 3, line 8 - line 10            page 3, column 3, line 38 - line 41            page 5, column 7, line 1 - line 9            page 5, column 8, line 18 - line 29            page 5, column 8, line 43 - column 9, line 5            page 6, column 9, line 25 - line 32            page 8, column 13, line 31 - line 35            figure 2</p> <p style="text-align: center;">---</p> <p style="text-align: center;">-/--</p>	<p>1, 2, 4, 5,            8-10, 12,            14</p>

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the International filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the International filing date but later than the priority date claimed

\*T\* later document published after the International filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*B\* document member of the same patent family

Date of the actual completion of the International search

26 October 2001

Date of mailing of the International search report

02/11/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5618 Patentlaan 2  
 NL - 2280 HV Rijswijk  
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
 Fax: (+31-70) 340-3016

Authorized officer

Moreno, M

## INTERNATIONAL SEARCH REPORT

Inte 1al Application No

PCT/EP 01/02813

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 1 011 245 A (MATSUSHITA ELECTRIC IND CO LTD) 21 June 2000 (2000-06-21)  page 3, column 3, line 54 -column 4, line 17 page 4, column 5, line 56 -column 6, line 4 page 9, column 15, line 28 - line 45 abstract figure 3B  ---	1,2,4, 7-10, 12-14
A	EP 0 944 200 A (FUJITSU LTD) 22 September 1999 (1999-09-22) page 3, line 37 - line 39 page 6, line 43 - line 54 page 8, line 50 - line 56 figure 5  ---	1,4,7,9, 13,14
A	EP 0 848 515 A (ROHDE & SCHWARZ) 17 June 1998 (1998-06-17) page 2, column 1, line 32 - line 38 page 2, column 2, line 47 - line 58  -----	1-3, 8-11,14

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0822714	A	04-02-1998	US 5946052 A	31-08-1999
			BR 9704214 A	26-01-1999
			BR 9704216 A	26-01-1999
			BR 9704217 A	26-01-1999
			CN 1175166 A	04-03-1998
			CN 1175849 A	11-03-1998
			CN 1176560 A	18-03-1998
			EP 0822714 A2	04-02-1998
			EP 0822715 A2	04-02-1998
			EP 0822716 A2	04-02-1998
			JP 10117329 A	06-05-1998
			JP 10117330 A	06-05-1998
			JP 10117328 A	06-05-1998
			SG 53022 A1	28-09-1998
			SG 53023 A1	28-09-1998
			US 5946045 A	31-08-1999
EP 1011245	A	21-06-2000	JP 2000031944 A	28-01-2000
			AU 4397299 A	24-01-2000
			EP 1011245 A1	21-06-2000
			CN 1273732 T	15-11-2000
			WO 0002359 A1	13-01-2000
EP 0944200	A	22-09-1999	JP 11275164 A	08-10-1999
			EP 0944200 A2	22-09-1999
EP 0848515	A	17-06-1998	DE 19651593 A1	18-06-1998
			EP 0848515 A2	17-06-1998
			US 6262994 B1	17-07-2001